

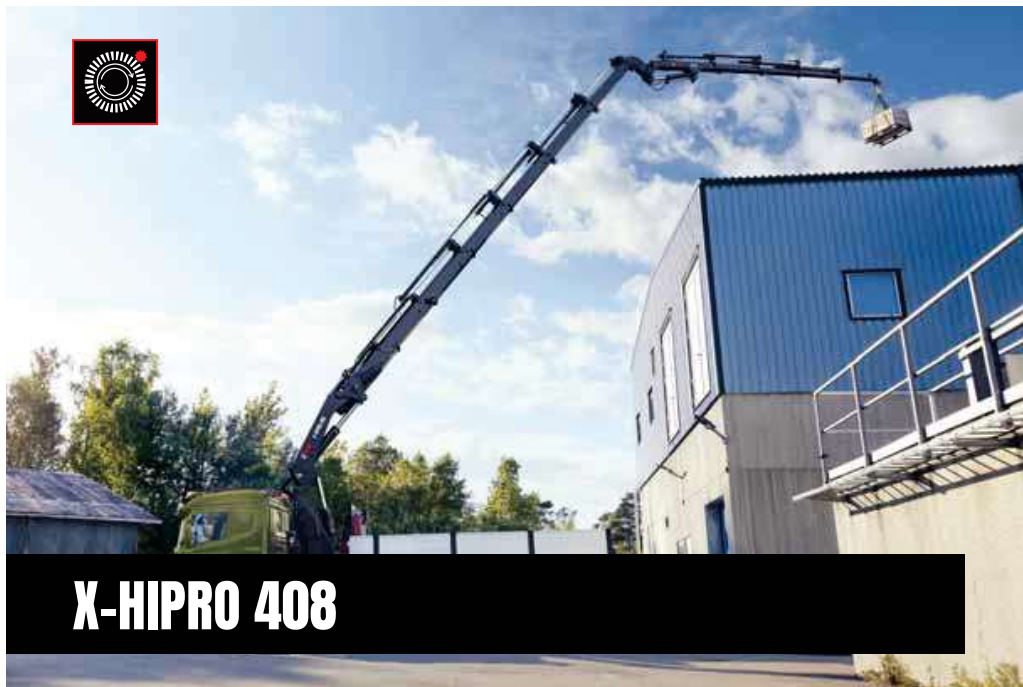




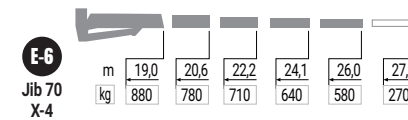
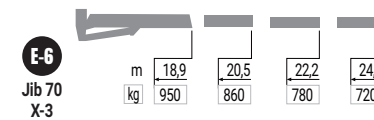
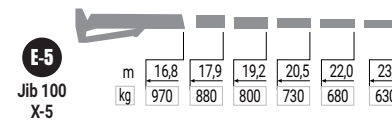












X-HIPRO 408



MODEL						
	txm	(°)	mm	mm	mm	kg
E-4	37,2	∞	2458	2501	1324	4256
E-5	36,6	∞	2458	2501	1365	4459
E-6	36,0	∞	2458	2501	1380	4648
E-7	35,5	∞	2458	2501	1406	4823
E-8	35,1	∞	2458	2542	1406	4955
E-4 JIB 100 X-2	37,2	∞	2655	2501	1404	5113
E-4 JIB 100 X-3	37,2	∞	2655	2501	1404	5204
E-4 JIB 100 X-4	37,2	∞	2655	2501	1404	5264
E-4 JIB 100 X-5	37,2	∞	2655	2501	1404	5331
E-5 JIB 70 X-3	36,6	∞	2717	2501	1404	5205
E-5 JIB 70 X-4	36,6	∞	2717	2501	1404	5277
E-5 JIB 100 X-2	36,6	∞	2656	2501	1404	5323
E-5 JIB 100 X-3	36,6	∞	2656	2501	1404	5414
E-5 JIB 100 X-4	36,0	∞	2655	2501	1404	5474
E-5 JIB 100 X-5	36,0	∞	2655	2501	1404	5541
E-6 JIB 70 X-3	36,0	∞	2722	2501	1404	5391
E-6 JIB 70 X-4	36,0	∞	2722	2501	1404	5463